




1.2m / 4ft Class 3 microwave parabolic antenna Dual Polarized Antenna

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Famous
- Certification: CE ISO9001
- Model Number: Microwave Parabolic Antenna
- Minimum Order Quantity: 1 SET
- Price: Negotiable
- Packaging Details: Standard export packaging/customizable packaging
- Payment Terms: T/T L/C

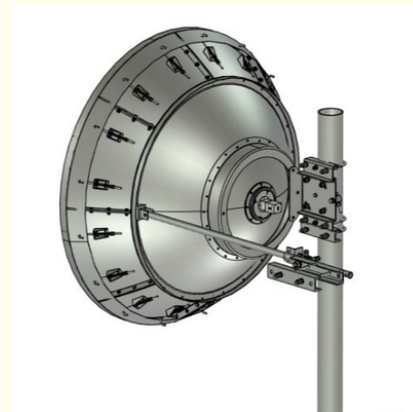

Product Specification

- Highlight: Class 3 microwave parabolic antenna,
4 ft microwave parabolic antenna,
1.2m dual polarized antenna



More Images



for more products please visit us on mw-antenna.com

Product Description

1.2m/4ft Class3 Dual-Polarized Antenna

- Our patent split-lobe microwave communication parabolic antenna for large diameter, which can save packaging and transportation costs greatly without any quality compromised
 - High Performance ETSI Class 3 & US FCC 101 compliance parabolic antennas with exceptional front/back ratio – Excellent performance for a wide range of applications
 - Simple Assembly – Minimal required assembly simplifies installation on site and guarantees “factory-tested” quality
- Electrical performance:

1.2m/4ft ultra high XPD performance dual-polarized microwave parabolic antenna specification

Antenna Model	Antenna Size(m/ft)	Frequency (GHz)	Gain(dBi)			3dB BW (deg)	XPD (dB)	VSWR	F/B ratio (dB)	ISO
			Low	Mid	Top					
CMP124DC	1.2m/4ft	4.4-5.0	32.0	32.6	33.1	3.7	40	1.2	58	45
CMP126WDC	1.2m/4ft	5.925-7.125	34.9	35.7	36.5	2.7	40	1.15	61	45
CMP127WDC	1.2m/4ft	7.125-8.5	36.5	37.3	38.0	2.2	40	1.15	63	45
CMP1210WDC	1.2m/4ft	10-11.7	39.6	40.2	40.8	1.6	40	1.15	65	45
CMP1213WDC	1.2m/4ft	12.2-13.25	41.6	41.7	41.9	1.3	40	1.15	66	45
CMP1215DC	1.2m/4ft	14.4-15.35	42.6	42.9	43.2	1.1	40	1.15	66	45

1.2m/4ft high XPD performance dual-polarized microwave parabolic antenna specification

Antenna Model	Antenna Size(m/ft)	Frequency (GHz)	Gain(dBi)			3dB BW (deg)	XPD (dB)	VSWR	F/B ratio (dB)	ISO
			Low	Mid	Top					
CMP124DA	1.2m/4ft	4.4-5.0	32.0	32.6	33.1	3.7	30	1.2	58	35
CMP126WDA	1.2m/4ft	5.925-7.125	34.9	35.7	36.5	2.7	30	1.15	61	35
CMP127WDA	1.2m/4ft	7.125-8.5	36.5	37.3	38.0	2.2	30	1.15	63	35
CMP1210WDA	1.2m/4ft	10-11.7	39.6	40.2	40.8	1.6	30	1.15	65	35
CMP1213WDA	1.2m/4ft	12.2-13.25	41.6	41.7	41.9	1.3	30	1.15	66	35
CMP1215DA	1.2m/4ft	14.4-15.35	42.6	42.9	43.2	1.1	30	1.15	66	35

1.2m/4ft standard performance dual-polarized microwave parabolic antenna specification

Antenna Model	Antenna Size(m/ft)	Frequency (GHz)	Gain(dBi)			3dB BW (deg)	XPD (dB)	VSWR	F/B ratio (dB)	ISO
			Low	Mid	Top					

			Low	Mid	Top					
CMP124DA	1.2m/4ft	4.4-5.0	32.0	32.6	33.1	3.7	30	1.2	58	35
CMP126WDA	1.2m/4ft	5.925-7.125	34.9	35.7	36.5	2.7	30	1.15	61	35
CMP127WDA	1.2m/4ft	7.125-8.5	36.5	37.3	38.0	2.2	30	1.15	63	35
CMP1210WDA	1.2m/4ft	10-11.7	39.6	40.2	40.8	1.6	30	1.15	65	35
CMP1213WDA	1.2m/4ft	12.2-13.25	41.6	41.7	41.9	1.3	30	1.15	66	35
CMP1215DA	1.2m/4ft	14.4-15.35	42.6	42.9	43.2	1.1	30	1.15	66	35

Mechanical performance:

Diameter of Mounting Pole	Φ114 mm
Fine Azimuth Adjustment	Coarse 360° Fine ±15°
Fine Elevation Adjustment	Fine ±10°
Wind Velocity Operational	180km/h
Wind Velocity Survival	200km/h
Ice-load	25.4 mm
Operational Temperature	-55~ +70



Wuxi Famous Communication Equipment Co., Ltd.

+86 13255118228

eric@mw-antenna.com

mw-antenna.com

Room 803, Wisdom Building, No. 18 Wisdom Road, Huishan Economic Development Zone, Huishan District,
Wuxi City, Jiangsu Province, China